



Visco Produces Industry-Leading Weather Seal Products

Visco Weather Seal Products has 50 years of experience designing, manufacturing and marketing industry-leading sealing products for windows and doors used in new construction and retrofit applications. Visco also holds a number of patents for its unique products and continues to design sealing products for custom applications.

Visco Offers A Complete Line of Sealing Products

As shown under the tabs of this binder, Visco offers a complete line of sealing products in every product category. To assure that the line is as complete and cost-effective as possible, Visco also selects complimentary products from other leading manufacturers. If you do not find the product you need, please contact our production design service for assistance.

Visco Offers Design Service For Custom Products

Visco has the capability to design and manufacture custom sealing products for your special needs. If you can not find a suitable product in this catalog, please contact us. We will design and make custom sealing products for your specific requirements.

Visco's Products Are Approved For Sound Abatement

Many of Visco's products are used in sound abatement programs across the country, including Massport in Boston, and airports in Providence and Baton Rouge. Please consult with us for your sound abatement applications.

Visco's Products Reduce Heating And Cooling Costs

Many of Visco's caulking, insulating and sealing products are being used to reduce both heating and a cooling costs in residential and commercial buildings. Please consult with us for all your energy reduction needs.



All Thresholds are made with a heavy duty aluminum extrusion in mill finish. They are available in any length up to 24' linear feet. They are predrilled and countersunk. Wood screws and plastic or lead anchors are provided. The AT-599 and AT-1000 are available with either a gray or black vinyl insert, or with a brush fin-seal insert.

SPECIFICATIONS

- Construction: Heavy duty aluminum extrusion.
- Finish: Mill finish aluminum (US27).
- Lengths: Any length up to 24 linear feet.
- Mounting Hardware: Wood screws and plastic anchors are provided with 36", 42", and 48" thresholds.

AT-401

- 4" Flat Threshold
- 1/2" Rise



AT-600

- 5" Flat Threshold
- 1/2" Rise



AT-601

- 6" Flat Threshold
- 1/2" Rise



AT-700

- 7" Flat Threshold
- 1/2" Rise



AT-800

- 8" Flat Threshold
- 1/2" Rise



AT-500

- 5" Flat Threshold
- 1/₄" Rise








AT-625


- 5" Flat Threshold
 1/4" Rise






AT-599

- 5" Panic Threshold 7/8" Rise
- Available Inserts: Vinyl Bubble, Gray or Black Brush Fin-seal

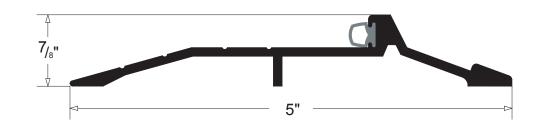

AT-1000

- 5" Flooring Threshold $\frac{7}{8}$ " Rise
- · Available Inserts: Vinyl Bubble, Gray or Black Brush Fin-seal

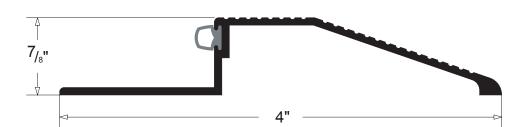

HOW TO ORDER

AT599G-36

MODEL	DESCRIPTION		LENGTH
AT-401	Saddle Threshold, 4"x1/2"	36	36 Inches
AT-600	Saddle Threshold, 5"x1/2"	42	42 Inches
AT-601	Saddle Threshold, 6"x1/2"	48	48 Inches
AT-625	Saddle Threshold, 6"x1/4"	72	72 Inches
AT-700	Saddle Threshold, 7"x1/2"	LF	Specify Length
AT-800	Saddle Threshold, 8"x1/2"		
AT-500	Saddle Threshold, 5"x1/4"		
AT-599G	Panic Threshold, 5" - Grey Insert		
AT-599B	Panic Threshold, 5" - Black Insert]	
AT-599F	Panic Threshold, 5" - Fin-Seal		
AT-1000G	Floor Threshold, 5" - Grey Insert		
AT-1000B	Floor Threshold, 5" - Black Insert		
AT-1000F	Floor Threshold, 5" - Fin-Seal		



Air Conditioner Window Kit

VISCO has solved the problem of fitting your Air Conditioner into your window.

Its clean, affordable, and as easy as 1-2-3!

The "L SHAPED FOAM" is uniquely designed to fit securely into most window frames.

Each package contains 3 pieces of sturdy, durable foam enough for an entire window.

Made of durable, flexible polyurethane foam contoured to fit most windows.


Purchase individually or in a new convenient P.O.P. (Point of Purchase) display box of 48, complete with UPC bar coding.

KEEP OUT UNWANTED WEATHER.
TRY THIS NEW VISCO WEATHERSEAL PRODUCT.

Now available by calling 1-800-628-9680, or in Rhode Island call 831-1665, FAX: (401) 751-2720.

- Reduces Vibration
- Protects Window Sills
- Saves Energy
- Improves Air Conditioning
- Keeps Insects Out
- Makes Installation A Snap

Throw Away Your Old Rags & Duct Tape!

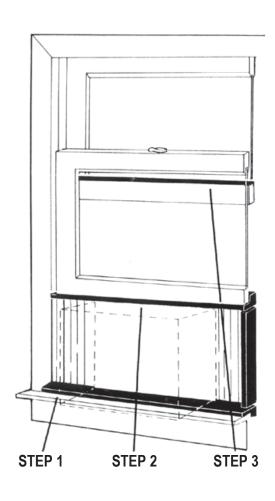





E-Z FIT

Air Conditioner Replacement Panels

UNIVERSAL FIT

Make installing any size and any model A/C clean and easy.


- Complete Kit Includes All Hardware
- Fits Most Window A/C's
- Weatherproof
- Easy To Install
- Insulation Value Increases A/C output
- Keeps Out Bugs
- Reduces Vibration And Noise
- Neat And Clean
- E-Z 3 Step Installation

Throw Away Your Old Rags & Duct Tape!




Average installation time – 20 min.


Remove existing side panels, leaving only the frame.
Measure the inside of the A/C frame when extended to the window jamb.



Cut the foam to fit.



Slide panel into A/C frame placing the plastic channel against A/C body.
Install A/C according to manufacturer's directions.



Patent Number: D-417, 725



BS-196 - Brush Door Sweep


Construction: Extruded Aluminum Insert: 5/8" or 1" Nylon Brush Strip

Finish: Aluminum or Brown Anodized Finish

Lengths: Sold by the linear foot

<u>BS196-58-AL</u>

MODEL	DESCRIPTION	BRUSH SIZE		RUSH SIZE FINIS	
BS-196	Brush Door Sweep	58	5/8 inch	AL	Aluminum
	•	1	1 inch	BR	Brown



SS045 - Standard Door Sweep


Construction: Extruded Aluminum

Insert: 5/8" Vinyl Insert

Finish: Aluminum, Brown or White Finish Lengths: 36", 42", or 48", or by the linear foot

SS045-AL-36

MODEL	DESCRIPTION		FINISH		LENGTH
SS045	Door Sweep	AL Aluminum		36	36 inches
		BR	Brown	42	42 inches
		WH	White	48	48 inches
			-	LF	Specify
					Length




HS051 - Heavy Duty Door Sweep

Construction: Extruded Aluminum Insert: 3/4" Neoprene Insert Finish: Aluminum or Brown Finish

Lengths: 36", 42", or 48", or by the linear foot

HS051-AL-36

			=		
MODEL	DESCRIPTION		FINISH		LENGTH
HS051	Door Sweep	AL	Aluminum	36	36 inches
		BR	Brown	42	42 inches
				48	48 inches
				LF	Specify
				L	Length



*Approved for Sound Abatement Program.



TS100 Door Triple Sweep

Construction: Extruded Aluminum


Insert: 3/4" Vinyl Insert

Finish: Aluminum or Brown Finish

Lengths: 36", 42", or 48", or by the linear foot

TS100-AL-36

MODEL	DESCRIPTION		FINISH		LENGTH
TS100	Door Sweep	AL	Aluminum	36	36 Inches
		BR	Brown	42	42 Inches
			•	48	48 Inches
				72	72 Inches
				LF	Specify Length



TS150 Door Triple Sweep

Construction: Extruded Aluminum


Insert: 1" Vinyl Insert

Finish: Aluminum or Brown Finish

Lengths: 36", 42", or 48", or by the linear foot

TS150-AL-36

MODEL	DESCRIPTION		FINISH		LENGTH
TS150	Door Sweep	AL	Aluminum	36	36 Inches
		BR	Brown	42	42 Inches
				48	48 Inches
				72	72 Inches
				LF	Specify Length



DB215 - Automatic Door Bottom

Construction: Aluminum Construction, Piano Type


Hinge and Stainless Steel Spring


Insert: Vinyl

Action: Cam Activated Finish: Satin Aluminum Lengths: 36" or 48"

DB215-36

MODEL	DESCRIPTION		LENGTH
DB215	Automatic	36	36 Inches
	Door Bottom	48	48 Inches





*Approved for Sound Abatement Program.



An Element of Protection From The Elements

We keep out what belongs out.

VISCO Door Sweeps are made to withstand mother nature's harshest conditions. Our weatherseals provide a tight air and water seal, while permitting ease of door operation.

Sizes, colors to fit your needs.

We feature eight door sweep models in varying standard sizes but can cut to fit specific size requirements. Our door sweeps offer the versatility of both kerf mount and Staple-up profiles for easy application.

Select from standard beige or bronze colors.

PP952

Single Barb Leg Door Sweep with 4 sealing wands & drip cap.

PP990

Non-Handed, Dual Bulb Door Sweep with center sealing leg.

PP991

Rigid Staple or Screw Mounted Door Sweep offers 4 sealing wands & drip cap

PP997

Staple Mounted Door Sweep features exterior bulb and extended interior leg to assure tight seal.


Products made to endure tough conditions.

All of our products are made of the highest quality thermoplastic materials for durability. And we engineer and produce each shape to fully meet our customer's exacting requirements.

Whether ordering door sweeps or another custom profile extrusion, you'll get quality products, design assistance, prompt delivery, emergency service, and a willingness to provide what you want.

Quick delivery, easy installation.


Our quick ship program will fill your order fast. Ready for installation, simply apply a bead of caulking and insert or staple into place. Quick and easy.

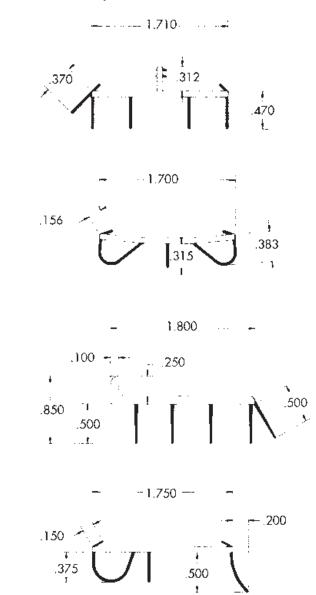




PP998

Staple Mounted Door Sweep with bulb and 4 sealing wands. Flexible TPE material withstands the harshest elements.




PP1000

Dual Kerf Mounted Door Sweep features exterior bulb seal with 4 sealing wands. Barbed legs are prenotched for easy application.




PP1226

Dual Kerf Mounted Door Sweep featuring both Pro-flex ★ heat and mechanical lock design with exterior bulb seal and 4 sealing wands.



PP1217

Adjustable Door Sweep offering a maximum amount of installation forgiveness. Provided with mounting holes for variable door sill heights.



^{*}Registered Trademark of Plastic Profiles, Inc.



DS060 - Door Weatherstripping


Construction: Pine wood strip or PVC, available as $1^3/_8$ " or $^3/_4$ " Quarter Round, or Bullnose or narrow.

Insert: Q-Lon soft cell foam insert. Foam has thermoplastic

cover and will not deteriorate.

Finish: Brown or White foam. Wood is primed, PVC is white. **Lengths:** 1-3' piece and 2-7' pieces. Specify wood or PVC.

<u>DS060-AL-B</u>							
MODEL	DESCRIPTION		FINISH		INSERT		
DS060	Door Weatherstripping	AL	Aluminum	В	Bullnose		
		BR	Brown	Q	Quarter Round 13/8		
					Narrow ³ / ₄		




OBS-296 - Offset Head Nylon Brush Door Gasket

Construction: Extruded aluminum. Insert: $\frac{5}{8}$ or 1" nylon brush strip.

Finish: Aluminum or Brown anodized finish.

OBS-296-58-AL

MODEL	DESCRIPTION	BR	USH SIZE		FINISH
OBS-296	Brush Weatherstripping	58	5/8 inch	AL	Aluminum
	-	1	1 inch	BR	Brown



BS88 - Pressure Sensitive Door Gasketing

Finishes: Dark Bronze, White.


Lengths: 17', 21', 25', and 500' coils.

Self-adhesive: For application between 50°F and 100°F with end use temperature range from -30°F to 150°F

- Begins compressing at 1 /₄" and can be compressed to seal 1 /₁₆" toleranced openings; will not lose its form.
- · Self-extinguishing and non-toxic.
- Impervious to dust and mildew, will not deteriorate under normal exposure. Unaffected by sunlight, ozone, and ultraviolet rays.

<u>B888</u> - <u>BR-25</u>								
MODEL	DESCRIPTION		FINISH		LENGTH			
BS88	Self-Adhesive	BR	Brown	17	17ft. coil			
	Door Weatherstripping	WH	White	21	21ft. coil			
				25	25ft. coil			
					500ft. coil (2x102ft.)			

D000 DD 05



*Approved for Sound Abatement Program.



DS319 - Heavy Duty Door Weatherstripping

Construction: Extruded aluminum. Slotted mounting


holes for easy adjustment.

Insert: Flexible, bubble type neoprene affixed behind aluminum that will not pull away from door once mounted.

Finish: Aluminum only.

Set: 1-3' piece and 2-7' pieces. Custom lengths also available.





DS070 - Heavy Duty (Rounded) Door Weatherstripping

Construction: Extruded aluminum. Mitered corners ensure a secure fit with slotted mounting holes for easy adjustment.


Insert: 1/4" flexible, bubble type neoprene or vinyl insert.

Finish: Aluminum finish.

Set: 1-3' piece and 2-7' pieces. Custom lengths also available.

<u>DS070-AL-V</u>						
MODEL	DESCRIPTION	FINISH		FINISH IN		NSERT
DS075	HD Door Weatherstripping	AL	Aluminum	V	Vinyl	
	-			N	Neoprene	

^{*}Approved for Sound Abatement Program.



DS075 - Heavy Duty (Low Profile) Door Weatherstripping

Construction: Extruded aluminum. Mitered corners ensure a secure fit with slotted mounting holes for easy adjustment.


Insert: 1/4" flexible, bubble type neoprene or vinyl insert.

Finish: Aluminum, brown or white finish.

Set: 1-3' piece and 2-7' pieces. Custom lengths also available.

<u>DS075-AL-V</u>							
MODEL	DESCRIPTION		FINISH	I	NSERT		
DS075	HD Door Weatherstripping	AL	Aluminum	V	Vinyl		
		BR	Brown	N	Neoprene		
		WH	White				

^{*}Approved for Sound Abatement Program.






DS080 - Light Duty (Rounded) Door Weatherstripping


Construction: PVC rigid vinyl. Mitered corners ensure a secure fit with slotted mounting holes for easy adjustment.

Insert: 1/4" flexible, bubble type neoprene or vinyl insert.

Finish: Brown or white finish.

Set: 1-3' piece and 2-7' pieces. Custom lengths also available.






DS050 - Door Weatherstripping

Construction Q-Lon: Extruded aluminum. Mitered corners ensure a secure fit with slotted mounting holes for easy adjustment.

Insert: Soft cell foam insert. Foam has thermoplastic cover and will not deteriorate.

Finish: Aluminum, brown or white finish.

Set: 1-3' piece and 2-7' pieces. Custom lengths also available.



DS050-AL

MODEL	DESCRIPTION	SCRIPTION FINISH		
DS100	Door Weatherstripping		Aluminum	
		BR	Brown	
		WH	White	


^{*}Q-Lon is replaceable without removing holder from the door.

^{*}Approved for Sound Abatement Program.



BS596 - Brush Astragal

Construction: Extruded aluminum Insert: 5/8" or 1" nylon brush.
Finish: Aluminum or Bronze
Lengths: 2-7ft. or 8ft. pieces.
Custom lengths also available.

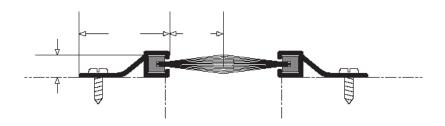

BS596-AL-58-7

MODEL	DESCRIPTION		FINISH	BR	USH SIZE		LENGTH
BS596	Astragal Nylon Brush	AL	Aluminum	58	5/8 inch	7	2-7ft. pieces
		BR	Bronze	1	1 inch	8	2-8ft. pieces

SA515 - Security Astragal

Security Astragal, Cam activated. Installed on push side of door. Each door may be active without requiring a coordinator.

Construction: Aluminum construction, piano type


hinge, and stainless steel spring.

Insert: Vinyl.

Action: Cam activated. Finish: Aluminum or Bronze


Length: Available in 96" length, may be cut from

either end to fit around panic hardware.







MODEL	DESCRIPTION	FINISH	
SA515	Security Astragal	AL	Aluminum
		BR	Bronze





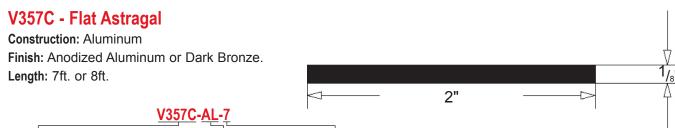




AA575 - Astragal

Construction: Extruded aluminum.

Insert: 5/8" vinyl strip.

Finish: Aluminum, Bronze or White

Set: 2-7ft. or 8ft. pieces Custom lengths available.

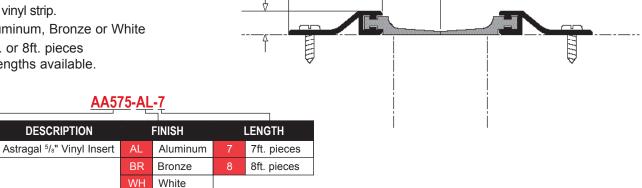


AA675 - Astragal

Construction: Extruded aluminum. Insert: 1/4" flexible, bubble type neo-

prene.

MODEL

AA575

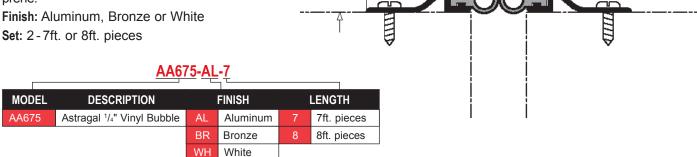

Pocket

Q-LON[®] Weatherseals

QWS-440



Pocket Opening: .125" (3.2mm) Reach: .280" (7.1mm)



Pocket Opening: .140" (3.5mm) Reach: .225" (5.7mm)

QWS-525



QWS-530

Pocket Opening: .125" (3.2mm) Reach: .250" (6.4mm)



QWS-580

Pocket Opening: .125" (3.2mm) Reach: .345" (8.8mm)



Pocket Opening: .215" (5.5mm) .402" (10.2mm)



AP-5210

Pocket Opening: .150" (3.8mm) Reach: .150" (3.8mm)



Pocket Opening: .150" (3.8mm) Reach: .340" (8.6mm)

Pocket

SKIRTING Textile Weatherseals

SK-510

SK-519

SK-527

SK-560





.090" (2.3mm)





Pocket Opening: .090" (2.3mm)



Pocket Opening: .090" (2.3mm)



Pocket Opening: .090" (2.3mm)

APTUS Plastic

APTUS Plastic

Pocket Opening: .158" (4.0mm)

Surface

Q-LON[®] Weatherseals

QWS-D

Width:

.240" (6.1mm)

Reach:

.140" (3.6mm)

QWS 6x6



Width: .235" (6.0mm)

Reach: .235" (6.0mm) QWS 3/8x1/4



.375" (9.5mm) Reach: .250" (6.4mm)

QWS 3/8x3/8



Reach: .375" (9.5mm) QWS 1/2x3/8



Width: .500" (12.7mm) Reach:

.375" (9.5mm)

QDS-375 QFS-375



Width: .420" (10.7mm) Reach: .385" (9.8mm)

QDST 675



Width: .580" (14.7mm) Reach: .675" (17.1mm)

Q-LON Corner Seals 2 Widths



Width: 1.313" (33.4mm)

Reach: .218" (5.5mm)



Width: 1.688" (42.9mm)

Reach: .218" (5.5mm) Replacement Door Seal



Surface

Textile Weatherseals

FIN-SEAL Door Sweep

Tape Back Pile Weatherstripping

Metal Back Pile Weatherstripping



Corner seal profiles not shown to size.



FIN-SEAL Corner Seal POLY-BOND Corner Seal

Surface

POLYFLEX[®] **Plastic Weatherseals**

PF-102

PF-114



PF-512



Profile Selection Guide

KERF-

T-SLOT-

-SURFACE-

POCKET-

Q-LON*-

APTUS*-

POLYFLEX*-

KERF-PILE-

TEXTILES



VISCO Weather Seal Products

7 Victory Avenue, Johnston, RI 02919

Phone: (401) 831-1665 Toll Free: 1-800-628-9680 Fax: (401) 751-2720

Web: www.viscoproduct.com

E-mail: info@visco.com

^{*}Registered Trademarks of Schlegel Systems, Inc.

Q-LON® Door Seals Kerf

QEBD-500

QDS-650

QEBD-650

QEB-653

OEBD-730

OEBD-825

OEB-M570

ODS-M670



Kerf Width: .125" (3.2mm) .512" (13.0mm)



Kerf Width: .125" (3.2mm) Reach: .650" (16.5mm)



Kerf Width: .125" (3.2mm) Reach: .650" (16.5mm)

Kerf Width: .125" (3.2mm) Reach: .650" (16.5mm)



Kerf Width: .125" (3.2mm) Reach: .740" (18.8mm)

Kerf Width: .125" (3.2mm) Reach:



.125" (3.2mm)

Kerf Width: Reach: .670" (17.0mm) .570" (14.5mm)



Kerf Width: .125" (3.2mm) Reach:

Kerf

Q-LON® Weatherseals

QEZ-100

QEZD-260

QEZ-293

QEZD-320



.825" (20.9mm)

Kerf Width: .078" (2.0mm)

Reach: .336" (8.5mm)

QWS-DH1

QEZ-374*



Kerf Width: .078" (2.0mm)

Reach: .374" (9.5mm)

QEZ-120

Kerf Width: .078" (2.0mm)

Reach: .315" (8.0mm)



OWS-109

Kerf Width:

.078" (2.0mm)



Kerf Width:

.106" (2.7mm)

Reach:

.334" (8.5mm)



Kerf Width: .078" (2.0mm)

.390" (9.9mm)

OWS-LS*



Kerf Width: .106" (2.7mm)

QWS-21

Kerf Width:

.078" (2.0mm)

Reach:

.100" (2.5mm)



Kerf Width: .106" (2.7mm) Reach:

.346" (8.8mm)



QWS-77

Kerf Width: .106" (2.7mm)

Reach: .250" (6.4mm)

Kerf Width: .106" (2.7mm) Reach: .270" (6.9mm)



Reach: .250" (6.4mm)

Kerf Width: .106" (2.7mm) Reach:

Reach: .410" (10.4mm)

Kerf

APTUS[®] **Plastic Weatherseals**

AP-150



Bulb Diameter: .140" (3.6mm) Kerf Width: .078" (2.0mm)

AP-412



Bulb Diameter: .300" (7.6mm) Kerf Width: .078" (2.0mm)

AP-425



Bulb Diameter: .250" (6.4mm) Kerf Width: .078" (2.0mm)

AP-427

Bulb Diameter: .275" (7.0mm) Kerf Width: .078" (2.0mm)

AP-435

Bulb Diameter: .350" (8.9mm) Kerf Width: .100" (2.5mm)

APF-310

Bulb Diameter: .310" (7.9mm) Kerf Width: .078" (2.0mm)

AP-625

Bulb Diameter: .250" (6.4mm) Kerf Width: .100" (2.5mm)

KERF PILE



AP-415

Bulb Diameter: .250" (6.4mm) Kerf Width: .078" (2.0mm)

Kerf

POLYFLEX[®] **Plastic**

PF-101 PF-103 PF-104

PF-109

PF-115 PF-130



PF-154 PF-145





PF-138 PF-141 PF-144











KP-11



.078" (2.0mm)



Kerf Width: .125" (3.2mm)



Kerf Width:



Kerf Width: .078"-.100" (2.0-2.5mm)



Kerf Width: .078"-.100" (2.0-2.5mm) .078"-.100" (2.0-2.5mm)



Kerf Width: .078" (2.0mm)



Kerf Width: .125" (3.2mm)



Kerf Width: .078" (2.0mm)

T-Slot

Q-LON[®] Weatherseals

Q150T190

Q200T190

Q225T190

Q250T190

Q300T190

Q375T190



Backer Width: .190" (4.8mm)

Height: .150" (3.8mm)



Backer Width: .190" (4.8mm) Height:

.200" (5.1mm)

Backer Width: .190" (4.8mm)

Height: .225" (5.7mm)



Backer Width: .190" (4.8mm)

Height: .250" (6.4mm)



Backer Width: .190" (4.8mm)

Height: .300" (7.6mm)



Backer Width: .190" (4.8mm) Height: .375" (9.5mm)

Q150T270

Q200T270

Q225T270

Q250T270

Q275T270

Q300T270

Q375T270

Backer Width: .270" (6.9mm)

Height: .150" (3.8mm)



Backer Width: .270" (6.9mm)

Height: .200" (5.1mm)



Backer Width: .270" (6.9mm)

Height: .225" (5.7mm)



Backer Width: .270" (6.9mm)

Height: .250" (6.4mm)



Backer Width: .270" (6.9mm)

Height: .275" (7.0mm)



Backer Width: .270" (6.9mm)

Height: .300" (7.6mm)



Backer Width: .270" (6.9mm)

Height: .375" (9.5mm)

QET 3001

QET 3002



Backer Width:

.270" (6.9mm) **Bulb Diameter:** .300" (7.6mm)



Backer Width:

.190" (4.8mm) **Bulb Diameter:** .400" (10.2mm)



Backer Width: .270" (6.9mm)

Bulb Diameter: .400" (10.2mm)

QEZ 447-2

.190" (4.8mm) **Bulb Diameter:** .300" (7.6mm)

QEZ 345

Backer Width:



Backer Width: .270" (6.9mm) Reach: .270" (6.9mm)

QEZ 376



Backer Width: .190" (4.8mm) Reach: .270" (6.9mm)

QEZ 447-1



.190" (4.8mm) Reach: .352" (8.9mm) Backer Width:

.270" (6.9mm) Reach: .352" (8.9mm)

T-Slot

Textile Weatherseals

POLY-BOND*

See Product Prints





See Product Prints



See Product Prints

EZ-FIN*



See Product Prints

V-PILE*



See Product Prints

Wide-Back **POLY-BOND***



See Product Prints

Angle Seal 290



Backer Width: .190" (4.8mm) Angle Seal 415



Backer Width: .190" (4.8mm)

*Registered Trademarks of Schlegel Systems, Inc.

APTUS[®] Plastic Weatherseals T-Slot



AP 202

Backer Width: .170" (4.3mm) Height:

.125" (3.2mm)

AP 519



Backer Width: .187" (4.8mm) **Bulb Diameter:** .500" (12.7mm)



Backer Width: .270" (6.9mm) **Bulb Diameter:**

.500" (12.7mm)

AP 525

Backer Width:

.190" (4.8mm) **Bulb Diameter:** .250" (6.4mm)

AP 305

Backer Width:

.190" (4.8mm) Height: .305" (7.8mm)



	PEMCO	NGP	ZERO	VISCO
ASTRAGALS				
	316	137		AA-695-(V9)
	303	97		AA-595
	1806	600		BS-595
	378			SA-515
	2959C72/96	139		Flat Bar
		137		Bulb Astragal
SWEEPS				
	307	79		SS045
	315	200	93	HS051
	5/8"-18062 / 1"-18100	⁵ / ₈ "-C607 / 1"-D608		BS-196
	57	96		TS100
				FS105
	405			DB215
DOOR SET				
				DS060
	306	184		DS050
	303	160 / 161		DS075
	316	152		DS070
	319	150	328	DS319
THRESHOLD				
	170	424	654	AT-400
	171	425	655	AT-600
	271	513	545	AT-500
	272	613	546	AT-625
	172	426	656	AT-601
	176	427	657	AT-700
	177	804	560	AT-599
	254			AT-800
				AT-100
	1"-45100 / 5/8"-45061	5/8"-602 / 1"-603		OBS
	S-88	252	188	BS-88
	S-44			PolyFlex

Phone: (401) 831-1665 Toll Free: 1-800-628-9680 Fax: (401) 751-2720 Web: www.viscoproduct.com e-mail: info@visco.com

VISCO Weather Seal Products 7 Victory Avenue, Johnston, RI 02919